


YJ Planar Fast Recovery Diode Die Specification

600V 40A, Fast recovery diode die based on silicon planar process
Part No.: FRD40A600AS-290A

Main Products Characteristics

- Average forward current: $I_F(A) = 40A$
- Maximum operating junction temperature: $T_j = 150\text{ }^\circ\text{C}$
- Planar Construction
- Top metal: Al

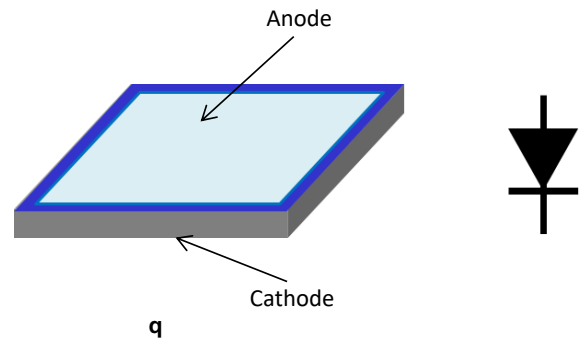

Maximum Ratings

Parameter	Symbol	Rating
Repetitive peak reverse voltage	V_{RRM}	600V
Average forward current	$I_{F(AV)}$	40A
Non-repetitive peak surge current ($t_p = 10\text{ ms}$, halfwave, 1 cycle)	I_{FSM}	300A
Storage temperature range	T_{stg}	-40 to +150 $^\circ\text{C}$
Maximum operating junction temperature	T_j	150 $^\circ\text{C}$

Static Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	
		Spec	Typical
Reverse breakdown voltage $I_R = 50\mu\text{A}$	V_{BR}	630V	680V
Maximum forward voltage drop $I_F = 20\text{A}$, Pulse Test: $t_p = 380\text{ }\mu\text{s}$, $\delta \leq 2\%$	V_F	1.45V	1.15V
Reverse Recovery Time $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$	T_{rr}	75ns	50ns
Maximum reverse current $V_R = V_{RRM}$ Pulse Test: $t_p = 10\text{ ms}$, $\delta \leq 2\%$	I_R	2 μA	0.05 μA

Device Schematics and Outline Drawing

Die Thickness	290 μm
Die Size *	4600 μm X4600 μm
Top Metal Pad	3872 μm X3872 μm
Active Area	3802 μm X3802 μm
Top Metal	Al
Back Metal	Ag

Note: 1 *: Cutting street width is around 40 μm

Important Notice

<p>Specification apply to die only. Actual performance may degrade when assembled.</p> <p>Yangjie Electronics does not guarantee device performance after assembly. All operating parameters must be validated for each customer application by customer's technical experts.</p> <p>Data sheet information is subjected to change without notice.</p>	<p>Recommended Storage Environment:</p> <p>Store in original container, in dessicated nitrogen, with no contamination.</p> <p>Shelf life for parts stored in above condition is 2 years.</p> <p>If the storage is done in normal atmosphere shelf life is reduced to 6 months.</p>
---	--